

Assembly instructions
HEATKILLER® GPU-X³ 6850/6870



The unique design of the HEATKILLER® GPU-X³ guarantees outstanding performance. A cooling performance in the range of current high-end CPU coolers, a flat design as well as top quality materials distinguish the new GPU-X³ series.

The bottom plate consists of pure copper. The cooling structure of the GPU is extremely fine-tuned and offers a higher performance than most CPU coolers. The thin base ensures even more performance.


HEATKILLER®	GPU-X ³ 6850	GPU-X ³ 6870	GPU-X ³ 69X0
Dimensions (LxWxH)	130.0 x 116.0 x 11.5mm	174.5 x 116.0 x 11.5mm	164.0 x 116.0 x 11.5mm
Weight	640g	760g	860g
Material (bottom/cover)	CU / VA	CU / VA	CU / VA
Connections	G ¼ inch	G ¼ inch	G ¼ inch
Temperature-resistant up to	80°C	80°C	80°C
Compatible with	AMD Radeon HD 6850	AMD Radeon HD 6870	AMD Radeon HD 6950 /6970

Note: You will find coloured assembly instructions in PDF format in the service area of our homepage. (www.watercool.de)


Attention: The Watercool company assumes no liability for any damages caused to hardware. If uncertain hire a specialist to carry out the modification, or use our modification service. By disassembling the original cooler you may cause the manufacturer's warranty to become void, if uncertain contact the manufacturer of the Graphic card.

Preparation of the Graphic card

Remove the original heatsink and all remnants of the thermal pads. Place the pre-cut pads on the graphics card as illustrated. Normally, both sides of the pads are covered with a protective film which must be removed before the installation.

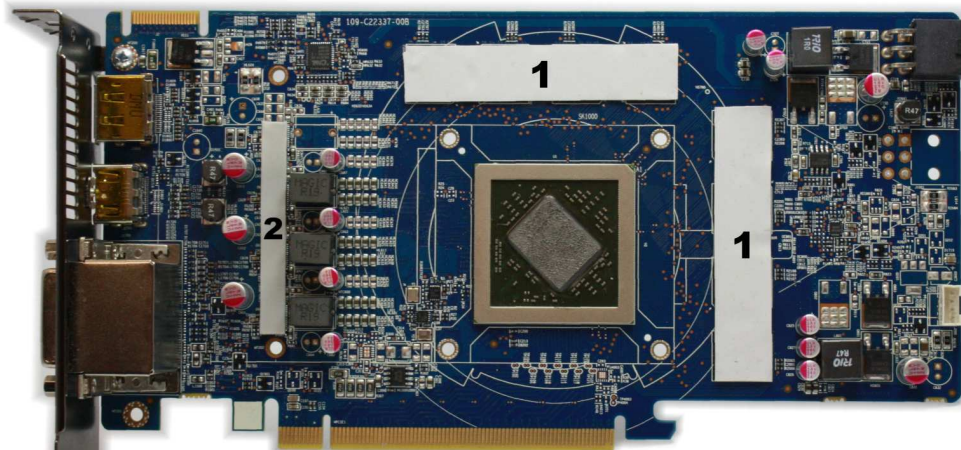

ATI Radeon HD 6850

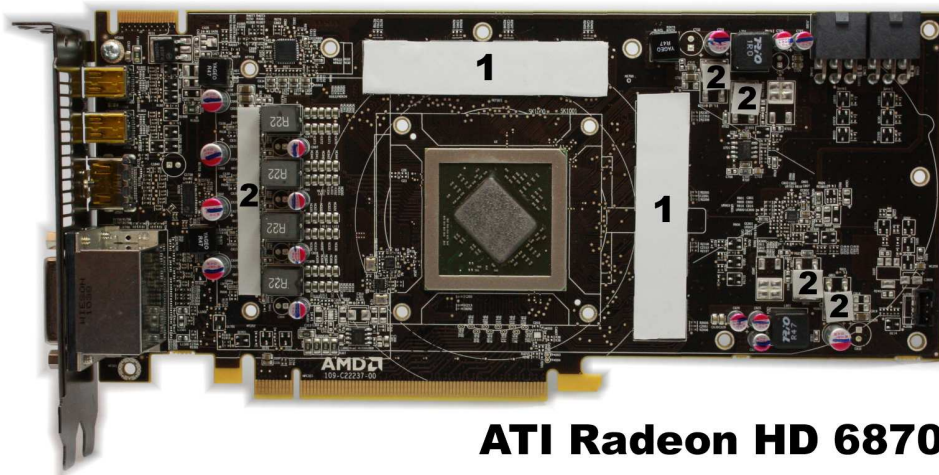

ATI Radeon HD 6870

Make sure to place the pads on the right components.

- No. 1 – thermal pad 0.25mm height (color light grey)
- No. 2 – thermal pad 0.25mm height (color light grey)


Instead of the thermal pads, you can use a non-conductive thermal compound on the RAM components, which slightly increases the cooling capacity in this area. However, we recommend using the enclosed pads.

Apply the thermal compound to the GPU area evenly.

Assembly of the cooler

The cooler is placed on the prepared graphics board. Then turn the board around together with the cooler. M3x8mm screws as well as plastic washers are enclosed with the cooler. Screw the screws – with washers – into the cooler beginning with the GPU area. Do not tighten the screws yet!

Once all screws are attached to the cooler, screw them tight beginning with the GPU area. Make sure to tighten the screws crosswise.

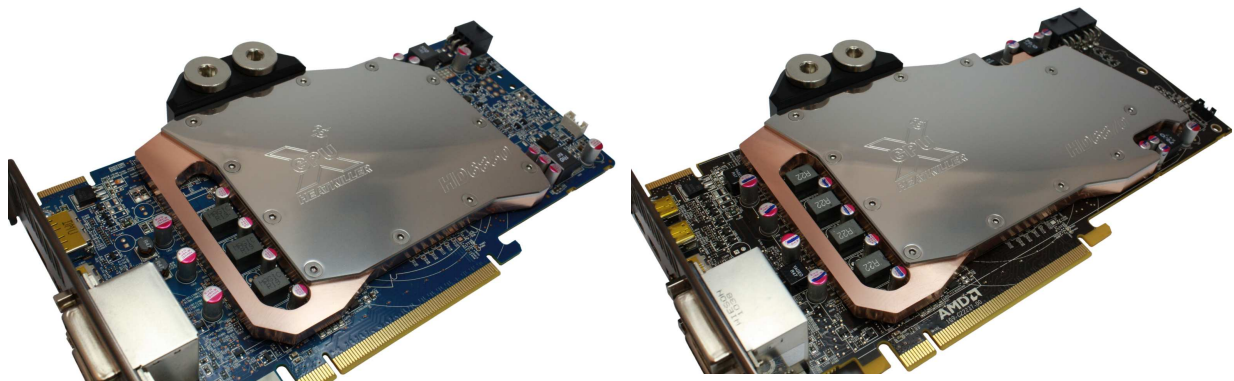

Installation and leak test

After the installation, a check and test run must be performed! The coolers are constructed on the reference design, still, all sections of the board have to be checked for possible contact to the cooler. In addition, the contact of the GPU to the cooler must be checked along with the bending of the board. A slight bending of the board is normal.

A leak test should preferably be performed outside of the computer. If this is not possible, the hardware may not be turned on during the test run!

Once all of the cooler elements were tested, the computer can be put into operation. Check the temperature of the GPU immediately after the start!

General information

The HEATKILLER® GPU-X³ 6850/6870 does not have a defined input and output. The cooling medium can stream in or out on both sides.

Under normal circumstances it is not necessary to open the cooler. If you still want to do so, please use a corresponding tool for Allen screws in industrial quality.

We recommend using demineralised or deionised water (distilled water) as cooling medium. To prevent the build-up of algae, use common citric acid. This reliably prevents the spread of algae. The cooler is fully Crossfire compatible. To set up a dual or triple Crossfire system, we offer special dual and triple links which allow you to easily connect the coolers.

HEATKILLER® are products by

WATERCOOL®
quality cooling equipment

Please send your criticism, praise or suggestions to the following address:

Watercool e.K
Zum Mevenbruch 6
D-17192 Waren - Warenschhof
GERMANY

Tel: (+0049) 03991-187601
Fax: (+0049) 03991-187602

E-Mail: info@watercool.de
Web: www.watercool.de